



Gel: c **RU** us

- Dielectric strength:**
>23 kV/mm
- Cross linking time:**
fast (about 10 min. at 23°C)
- Volume resistivity:**
>2 . 10¹⁵ Ω cm
- Working temperature:**
-60°C / +200°C
- Overload temperature for short periods:**
up to 250°C
- Stabilised for:**
mould - UV
- Degree of protection:**
IP68 (in proper casings)

IP68
OFFICIALLY TESTED

IMQ

Magic Gel & Magic Fluid

Bicomponent gel with very high dielectric and thermal characteristics, ideal for connection systems (joint shells or enclosures) for power cables.


The insulating and sealing gel, when cast in suitable casings, ensures an IP68 degree of protection and it is able to replace all types of resins. This is a self-polymer insulation in two practical bottles or in a single use bag, with cold cross linking. Once poured, the insulation, characterized by very low viscosity, surrounds and envelopes any type of material, cross linking in less than 10 minutes. Completely non-toxic, cross linking with a very slow isothermal peak that does not thermally stress the materials it comes into contact with.

- For high temperature applications!
- Quick cross linking (only 10 minutes)
- Re-enterable also after long working periods
- Non-toxic and safe with no shelf life
- Low viscosity




Examples of use



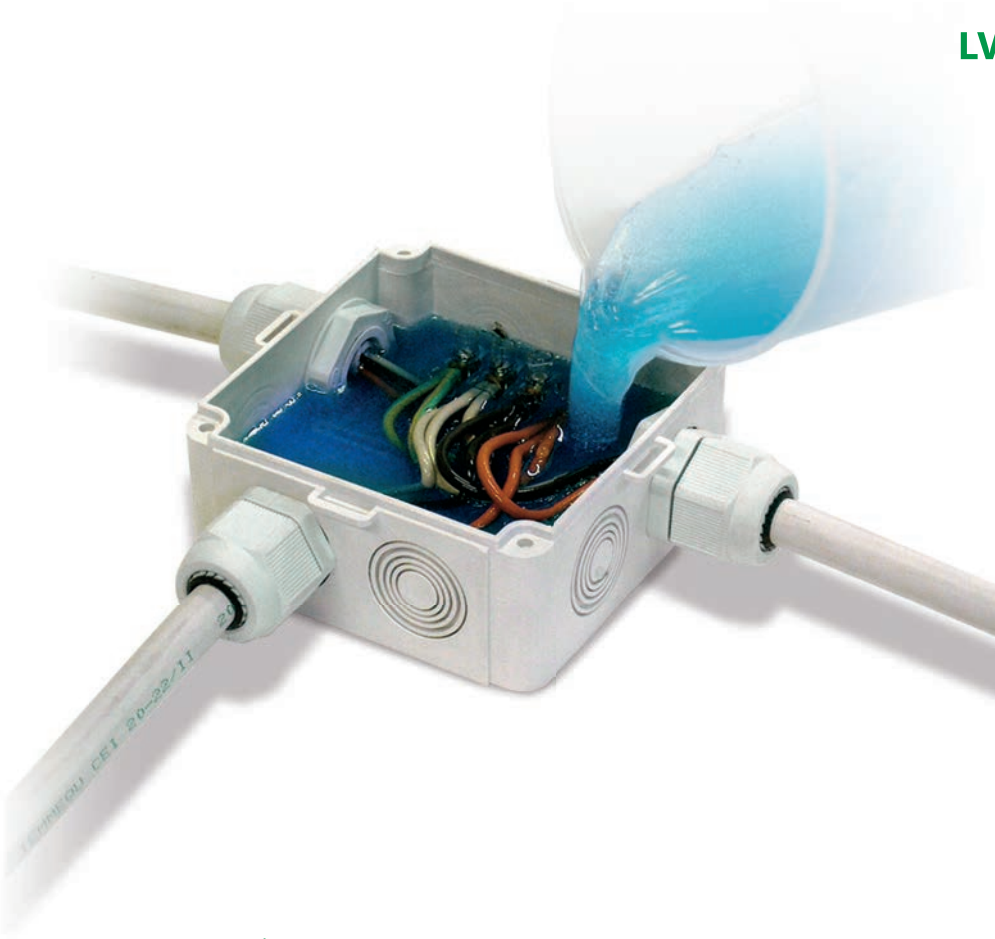

Magic Gel

Product	Colour	Package type	Total quantity
Magic Gel 300	●	2 bottles	300 ml
Magic Gel 1000	●	2 bottles - 1 small basin - 1 mixing spoon	1000 ml
Magic Gel 2000	●	2 bottles - 1 small basin - 1 mixing spoon	2000 ml
Magic Gel 10000	●	2 tanks - 1 small basin - 1 mixing spoon	10 lt

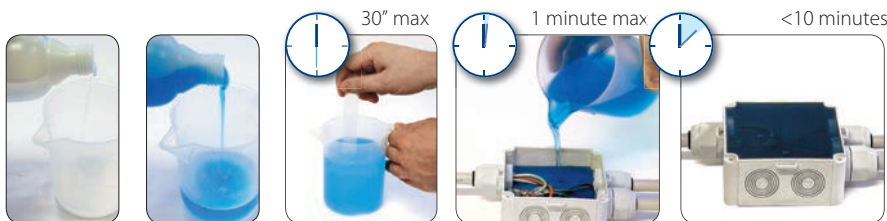

Magic Fluid

Product	Colour	Package type	Total quantity
Magic Fluid 90	●	Bicomponent single dose bags	90 gr
Magic Fluid 110	●	Bicomponent single dose bags	110 gr
Magic Fluid 170	●	Bicomponent single dose bags	170 gr
Magic Fluid 210	●	Bicomponent single dose bags	210 gr
Magic Fluid 420	●	Bicomponent single dose bags	420 gr
Magic Fluid 550	●	Bicomponent single dose bags	550 gr



Problem ENERGY

What does a gel for this type of system have to give?

- ✓ **INSULATION:** Elevated voltages (1 kV operating, 4 kV testing)
- ✓ **THERMAL PERFORMANCE:** Operating temperature 90°C, overload temperature 130°C, short circuit temperature 250°C
- ✓ **SEALING:** Installations also possible in humid environments, flooded wells
- ✓ **DEGREE OF PROTECTION:** Must also work with water between the cores of the cable
- ✓ **CERTIFIED SYSTEMS:** The combination of insulation gel + casing must comply with current standards CEI 20-33 and EN 50393

Solution: *Magic Gel* meets all your Energy system requirements!

