


BODO N

Single outlet with floor box and data module, wet-cleaned, round



Round single outlet with floor cover protection frame. Including pivotable tube as cable outlet, cover, mounting box with strain-relief, claw set and rubber seal. For installation in floor sockets and raised or hollow space floor openings. Equipped with an isolated ground receptacle of 45x45 mm and an RJ45 data socket of 22,5x45 mm (Legrand type Cat. 6A STP RJ45, 76573). Suitable for rooms with dry and wet-cleaned floor covers. Designed for high traffic loads.

Please mind the technical information in chapter planning.



material	Tube, cover and tube collet: aluminium or stainless steel / frame and mounting box: plastic material
type of assembly	Fixing on floor box UBDHB / rough concrete floor and installation in screed or false floor
application area	wet floor cleaning
norm	according to DIN EN 50085
permits	according to VDE / TÜV
protection class	in use IP 22 / in use with rubber sleeve UGM1-3 IP 43 / not in use IP 66
loading	including inspection stamp Ø 130 mm: 15 kN

Aluminium

Product	H	H _{min}	B	E	P _{max}	colour	IP _n	IP _g	G
BODO N	122 mm	87 mm	140 mm	122 mm	15 kN	aluminum	IP 66	IP 43	0.74 kg
incl.:									
1x UET80-R-WD 1x UETD80-R-WD 1x UDAE22-CAT6 8 1x UST45-W 1 1x UTG 75 1x UARM-3-1 118 1x UG-R 2x UGM1-3 1x UWZ-IS 8			tube tube cover data systems installation device single, 22,5x45 mm shockproof socket single device separation plate Cover plate for 3x UDAE22 mounting box, round rubber sleeve Allen wrench						
BODO N-SW	122 mm	87 mm	140 mm	122 mm	15 kN	black	IP 66	IP 43	0.74 kg



H : height

H_{min} : Minimum installation height

B : width

E : fitting dimension

P_{max} : Maximum load


colour :

IP_n : IP protection level in unused condition

IP_g : IP protection level in used condition

G : weight

DETAILS / APPLICATIONS

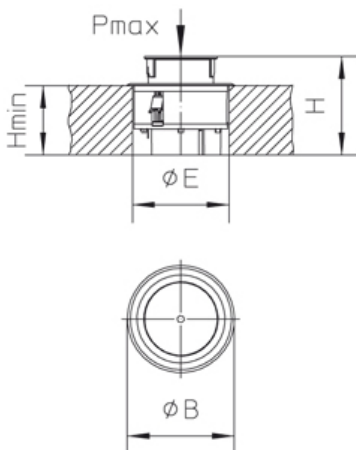

OPTIONAL ACCESSORIES

USK R122, UBDHB 122R



wet-cleaned



Electrical and electronic equipment must not be disposed off via the household waste.

