


UEKD2 V

installation unit - hinged cover double, quadrangular

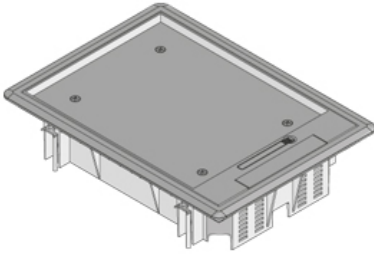

Quadrangular installation unit made of polyamide with a carpet protection frame. As an installation frame with lock-in leads for a gradual lowering of up to 2 mounting boxes (6 coulter clip installation devices or 8 installation devices of 45x45mm) by up to 30 mm, self-locking hinged cover with steel sheet inlay, floor flush 180° pivoting cable outlet and a self-closing opening lever, including an all-purpose mounting claw set. For the installation into floor boxes, assembly covers and into raised or hollow floor openings. Suitable for rooms with dry-cleaned floor covers of up to 8mm. Designed for office traffic loads.

Please mind the technical information in chapter planning.



material	Cover and frame: PA6, surface matt finished, steel sheet inlay: 3 mm hot-dip galvanized steel plate
type of assembly	Assembly in floor box UBDHB, double or hollow floor openings
application area	dry floor cleaning
norm	according to DIN EN 50085
permits	according to VDE / TÜV
protection class	in use IP 20 / not in use IP 30
loading	including inspection stamp Ø 13 / 130 mm: 2 / 3 kN

Polyamide

Product	H	H _{min}	B	L	E	T	P _{max}	colour	IP _n	IP _g	G
UEKD2-V-G	65 mm	74 mm	206 mm	280 mm	261 x 186 mm	8 mm	2 kN	RAL 7011 (iron grey)	IP 30	IP 20	1.40 kg
incl.:											
1x UDKS-V 4											
UEKD2-V-S	65 mm	74 mm	206 mm	280 mm	261 x 186 mm	8 mm	2 kN	RAL 9011 (graphite black)	IP 30	IP 20	1.40 kg
incl.:											
1x UDKS-V 4											

H : height

H_{min} : Minimum installation height



B : width

L : length

E : fitting dimension

T : depth

P_{max} : Maximum load


colour :

IP_n : IP protection level in unused condition

IP_g : IP protection level in used condition

G : weight

DETAILS / APPLICATIONS

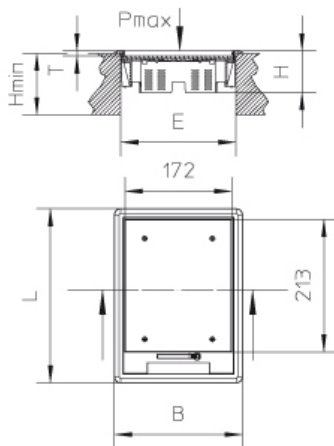

OPTIONAL ACCESSORIES

UDKS 40-80, UDKSEB



dry-cleaned

